

Specifications

Models	GR-12		GR-15		GR-20	
Measurements	US	Metric	US	Metric	US	Metric
Working height*	17 ft 4 in	5.45 m	20 ft 8 in	6.52 m	25 ft 9 in	8.02 m
Platform height	11 ft 4 in	3.45 m	14 ft 8 in	4.52 m	19 ft 9 in	6.02 m
Platform dimensions (length x width)						
Standard	35 x 29.5 in	.89 x .75 m	35 x 29.5 in	.89 x .75 m	35 x 29.5 in	.89 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Narrow AWP	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
Ground clearance - center	2.5 in	6 cm	2.5 in	6 cm	2.5 in	6 cm

Productivity

Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
Turning radius - outside	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 5 in	1.34 m
Raise / lower speed	20 / 18 sec	20 / 18 sec	21 / 19 sec	21 / 19 sec	24 / 21 sec	24 / 21 sec
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm	10 x 3 x 8 in	25 x 8 x 20 cm

Power


Power source	24V (four 6V 225 Ah batteries)		24V (four 6V 225 Ah batteries)		24V (four 6V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L

Weight***

	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg
--	-----------	--------	-----------	--------	-----------	----------

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

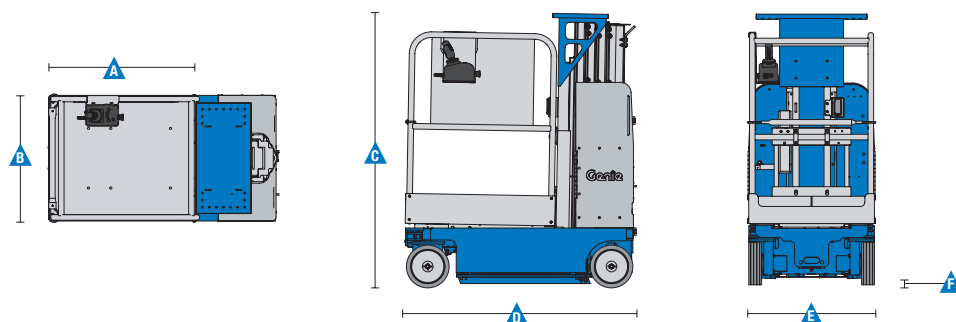

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

Standard Features	Standard Features	Options & Accessories
Measurements GR-12 <ul style="list-style-type: none"> • 17 ft 4 in (5.45 m) working height • 11 ft 4 in (3.45 m) platform height • Up to 500 lbs (227 kg) lift capacity GR-15 <ul style="list-style-type: none"> • 20 ft 8 in (6.52 m) working height • 14 ft 8 in (4.52 m) platform height • Up to 500 lbs (227 kg) lift capacity GR-20 <ul style="list-style-type: none"> • 25 ft 9 in (8.02 m) working height • 19 ft 9 in (6.02 m) platform height • Up to 350 lbs (159 kg) lift capacity Productivity <ul style="list-style-type: none"> • Work station tray (GR™-12, GR™-15 only) • Standard platform with sliding midrail • Auxiliary platform lowering • Patented rigid mast system • Compact base 29.5 x 53 in (.75 m x 1.35 m) (GR™-12, GR™-15 only) • Ground clearance 2.5 inches (stowed) • SmartLink™ control system • Battery charge indicator • On-board diagnostic system • AC power to platform • Descent and tilt alarm • Zero inside turning radius • Dual wheel brakes • Hydraulic brake release • Pothole protection 	Productivity (continued) <ul style="list-style-type: none"> • Hinged rear ABS covers for easy access to all major electrical and hydraulic components • Tie down attachment points • Overhead crane attachment point • Large forklift pockets access • Non-marking solid tires • Motion alarm • Dual LED flashing beacons • Proportional drive and lift Power <ul style="list-style-type: none"> • Automatic 19 amp battery charger 	Productivity <ul style="list-style-type: none"> • 20 in (.51 m) extension platform with sliding midrail • 20 in (.51 m) extension platform with gate • Narrow AWP platform with gate • Platform control guard • Fluorescent tube caddy • Automotive horn • EE Certification* • Biodegradable hydraulic oil • Drive cutout while charging • 10 ft retractable charging cord* Power <ul style="list-style-type: none"> • 24V (four 6V 225 Ah batteries) • 800 watt, 24 V inverter (120-230V AC/50-60 Hz) • AGM maintenance-free batteries



* Not available with automotive horn or inverter
** Not available with inverter

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:

Effective Date: November, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2018 Terex Corporation.

Specifications

Models	GR-26J	
Measurements	US	Metric
Working height*	31 ft 11 in	9.90 m
Platform height	25 ft 11 in	7.90 m
Horizontal reach maximum**	8 ft 3 in	2.51 m
Up-and-over clearance maximum	21 ft 10 in	6.70 m
A Platform length	2 ft 5 in	0.75 m
B Platform width	2 ft 11 in	0.90 m
Toeboard height	6 in	0.15 m
C Height - stowed	6 ft 6 in	1.99 m
D Length - stowed	9 ft 1 in	2.76 m
E Width	3 ft 8.8 in	1.14 m
F Wheelbase	3 ft 11 in	1.20 m
G Ground clearance - center	3.4 in	8.5 cm

Productivity

Maximum platform occupancy***	2	
Lift capacity	500 lbs	227 kg
Vertical jib rotation	140° (+70°/-70°)	
Turntable rotation	350° non-continuous	
Turntable tailswing	1 in	2.5 cm
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability****	25%	
Turning radius - inside	31 in	0.78 m
Turning radius - outside	92 in	2.30 m
Controls	24V DC proportional	
Drive	dual rear wheel	
Disc brakes	dual rear wheel	
Tires (solid non-marking)	16-5-11 ¼	40.5 cm diam.



Power

Power source	24 V DC (twelve 2 V batteries, 280 Ah capacity)	
Hydraulic system capacity	4.84 gal	22 L

Weight*****	6,250 lbs	2,835 kg
-------------	-----------	----------

Standards Compliance	ANSI A92.5, CSA B354.4
----------------------	------------------------

Range Of Motion GR-26J

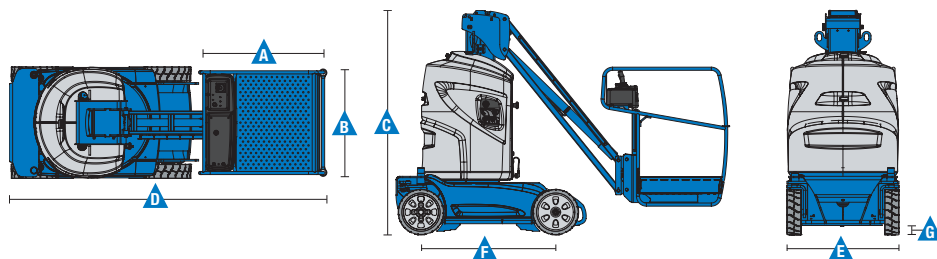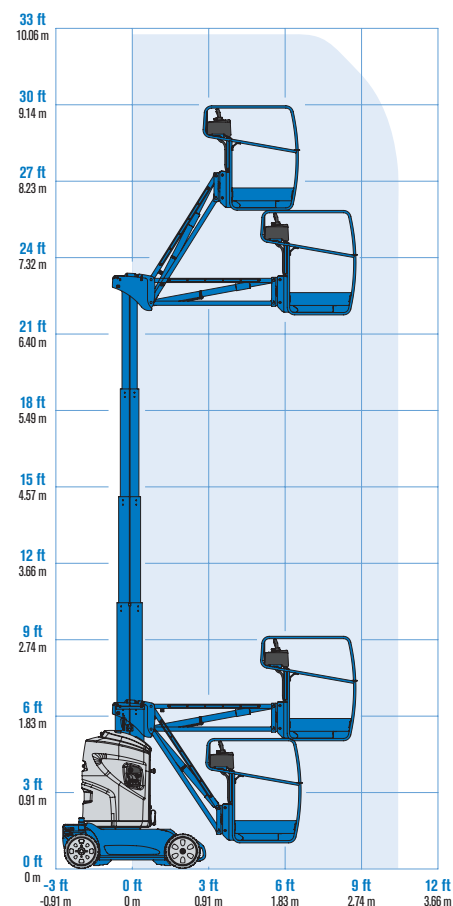

* The US equivalent of working height adds 6 ft to platform height.

** Non-working reach

*** ANSI/CSA maximum occupancy is 2 indoor and outdoor.

**** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

***** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GR-26J

- 31 ft 10 in (9.90 m) working height
- 8 ft 3 in (2.51 m) horizontal reach
- 21 ft 10.5 in up-and-over reach
- Up to 500 lbs (227 kg) lift capacity
- 4 ft 10 in (1.45 m) jib boom with 140° working range

Productivity

- Standard steel platform 2 ft 11 in x 2 ft 5.5 in (0.90 m x 0.75 m) with sliding midrail
- Hydraulic turntable rotation
- Fully proportional lift and drive system
- Drivable at full height
- Low 6 in (15 cm) platform entry height
- Rigid steel tube in hydraulic mast
- 44.8 in (1.14 m) compact width
- Low unit height of 6 ft 6 in (1.99 m)
- Low machine weight of 6,250 lbs (2,835 kg)
- Onboard diagnostic system
- AC power to platform
- Direct electric rear wheel drive with electric parking brake
- Front wheel steering
- Brake release switch
- Reinforced ABS chassis covers
- Tie down attachments points
- Overhead crane attachment points
- Non-marking solid tires
- Drive enable system
- Horn
- Hour meter
- Tilt level sensor with audible alarm
- Platform overload sensing
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Motion alarm
- Flashing beacon

Standard Features

Power

- Automatic 30 Amp 24 V battery onboard charger
- 24 V DC (twenty two 2V, 280 Ah traction batteries)
- Battery charge indicator






Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:

Effective Date: November, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2018 Terex Corporation.

Specifications

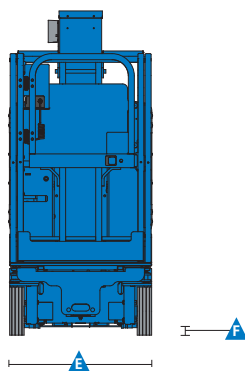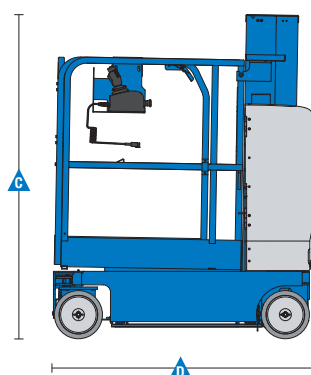

Models	GRC-12	
Measurements	US	Metric
Working height*	18 ft	5.65 m
Platform height	12 ft	3.65 m
A B Platform dimensions (length x width)		
Ext Platform dimensions - retracted	39 x 29.5 in	.99 x .75 m
Ext Platform dimensions - extended	55 x 29.5 in	1.4 x .75 m
C Height - stowed	67 in	1.70 m
D Length - stowed	4 ft 5.75 in	1.37 m
E Width ANSI, CSA	2 ft 5.5 in	.75 m
F Ground clearance - center	2.5 in	6 cm

Productivity

Lift capacity	500 lbs	227 kg
Lift capacity - extension deck	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability**	30%	
Turning radius - inside	zero	
Turning radius - outside ANSI/CSA	4 ft 4 in	1.32 m
Raise / lower speed	12 / 16 sec	12 / 16 sec
Controls	24V DC proportional	
Tires - solid non-marking	10 x 3 x 8 in	25 x 8 x 20 cm

Power

Power source	24V (four 6V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L

Weight***

ANSI, CSA	1,916 lbs	869 kg
-----------	-----------	--------

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

GRC-12

- 18 ft (5.65 m) working height
- 12 ft (3.65 m) platform height
- Up to 500 lbs (227 kg) lift capacity

Productivity

- 2-person rated
- Steel platform and extension deck with swing gate
- Auxiliary platform lowering
- Steel tube-in-tube mast system
- Compact base 29.5 x 53.75 in (.75 x 1.37 m)
- Ground clearance 2.5 inches (stowed)
- SmartLink™ control system
- Battery charge indicator
- On-board diagnostic system
- AC power to platform
- Work station trays
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear ABS covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Overhead crane attachment point
- Large forklift pockets access
- Non-marking solid tires
- Motion alarm
- Dual LED flashing beacons
- Proportional drive & lift

Power

- Automatic 19 amp battery charger

Options & Accessories

Productivity

- Fluorescent tube caddy*
- Automotive horn*
- EE Certification
- Biodegradable hydraulic oil
- Drive cutout while charging
- 10 ft retractable charging cord (U.S. only)**
- Platform Control Guard

Power

- 24V (four 6V 225 Ah batteries)
- 800 watt, 24V inverter (120-230V AC / 50-60 Hz)*
- AGM maintenance-free batteries



* Not available with EE Certification
** Not available with inverter EE Certification

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:



Effective Date: November, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2018 Terex Corporation.

Specifications

Models	QS-12		QS-15		QS-20	
Measurements	US	Metric	US	Metric	US	Metric
Working height*	17 ft 4 in	5.45 m	20 ft 8 in	6.47 m	25 ft 9 in	8.02 m
Platform height	11 ft 4 in	3.45 m	14 ft 8 in	4.47 m	19 ft 9 in	6.02 m
A B Platform dimensions (length x width)						
With tray down	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m	35 x 28.75 in	.89 x .73 m
With tray up	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	6 cm	2.5 in	6 cm	2.5 in	6 cm

Productivity

Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius - inside	zero		zero		zero	
Turning radius - outside	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 5 in	1.34 m
Raise / lower speed	20 / 18 sec		21 / 19 sec		24 / 21 sec	
Controls	24V DC proportional		24V DC proportional		24V DC proportional	
Tires - solid non-marking	10x3x8 in	25x8x20 cm	10x3x8 in	25x8x20 cm	10x3x8 in	25x8x20 cm

Power


Power source	24V (four 6V 200 Ah maintenance-free batteries)					
Hydraulic system capacity	2.2 gal	8.33 L				

Weight***

Retail (R) configuration	1,609 lbs	730 kg	2,220 lbs	1,007 kg	2,479 lbs	1,124 kg
Warehouse (W) configuration	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

Standards Compliance

ANSI A92.6, CSA B354.2, EN 280

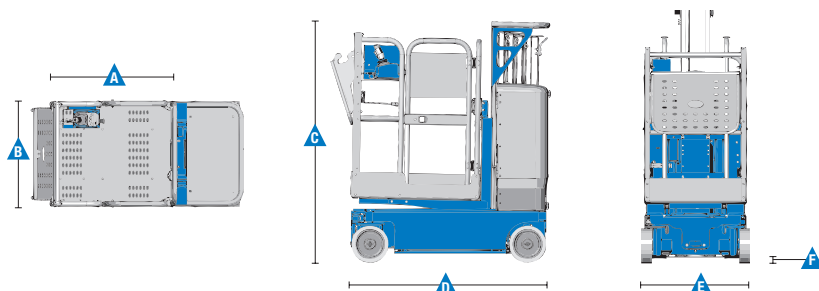

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

Features

Standard Features	Standard Features	Options & Accessories
Measurements QS-12R & QS-12W <ul style="list-style-type: none"> • 17 ft 4 in (5.45 m) working height • 11 ft 4 in (3.45 m) platform height • Up to 500 lbs (227 kg) lift capacity QS-15R & QS-15W <ul style="list-style-type: none"> • 20 ft 10 in (6.47 m) working height • 14 ft 10 in (4.47 m) platform height • Up to 500 lbs (227 kg) lift capacity QS™-20R & QS™-20W <ul style="list-style-type: none"> • 25 ft 9 in (8.02 m) working height • 19 ft 9 in (6.02 m) platform height • Up to 350 lbs (159 kg) lift capacity Power <ul style="list-style-type: none"> • Automatic 19 amp battery charger • AGM maintenance-free batteries • 6 ft (1.8 m) charger cord • 24V (four 6V 200 Ah maintenance-free batteries) Productivity <ul style="list-style-type: none"> • Stockpicker platform with dual side entry gates and front folding tray • Stockpicker rear parcel tray (QS-12 & QS-15, ANSI only) • Auxiliary platform lowering • Patented rigid mast system • Enclosed platform cables • Compact base 29.5 x 53 in (0.75 x 1.35 m) (QS-12 & QS-15 only) • SmartLink™ control system • Battery charge indicator • On-board diagnostic system • AC power to platform • Descent and tilt alarm • Zero inside turning radius • Dual wheel brakes • Hydraulic brake release 	Productivity (continued) <ul style="list-style-type: none"> • Pothole protection • Hinged rear ABS covers for easy access to all major electrical and hydraulic components • Tie down attachment points • Overhead crane attachment point • Large forklift pockets access • Flashing beacons (Retail configuration only) • Obstruction sensing pad (Retail configuration only) • Non-marking solid tires • Motion alarm Productivity (Retail configuration only) <ul style="list-style-type: none"> • Dual flashing beacons • Obstruction sensing pad 	Productivity <ul style="list-style-type: none"> • Adjustable front tray • EE Certification* • Biodegradable hydraulic oil • Drive cutout while charging • 10 ft retractable charging cord (not available with inverter/EE Certification) • Platform Bike Racks (Rear parcel tray not available with Bike Rack)



* Warehouse models only
** Not available with inverter

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By:

Effective Date: November, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2018 Terex Corporation.

Specifications

Models	AWP-20S		AWP-25S		AWP-30S	
Measurements	US	Metric	US	Metric	US	Metric
Working height*	26 ft 1 in	8.12 m	30 ft 10 in	9.60 m	35 ft 6 in	11.00 m
Platform height	20 ft 1 in	6.12 m	24 ft 11 in	7.60 m	29 ft 6 in	9.00 m
A Height - stowed (Standard)	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m
stowed (RT/Narrow)	6 ft 7 in	2.01 m	6 ft 7 in	2.01 m	6 ft 7 in	2.01 m
B tilted back** (Standard)	_____	_____	_____	_____	_____	_____
C Length - stowed (Standard)	4 ft 1 in	1.24 m	4 ft 3.5 in	1.31 m	4 ft 5 in	1.35 m
stowed (RT/ Narrow)	5 ft 3 in	1.60 m	5 ft 3 in	1.60 m	5 ft 3 in	1.60 m
D Length - tilted back**	_____	_____	_____	_____	_____	_____
E Width (Standard)	2 ft 5 in	.74 m	2 ft 5 in	.74 m	2 ft 5 in	.74 m
Width (RT)	2 ft 6 in	.76 m	2 ft 6 in	.76 m	2 ft 6 in	.76 m
Width (Narrow)	1 ft 10 in	.56 m	1 ft 10 in	.56 m	1 ft 10 in	.56 m

Productivity

Lift capacity	350 lbs	159 kg	350 lbs	159 kg	350 lbs	159 kg
ANSI/CSA:						
A F Outrigger footprint (l/w) (Standard)	5 ft 1 in/4 ft 5 in	1.55/1.35 m	5 ft 1 in/4 ft 5 in	1.55/1.35 m	5 ft 9 in/5 ft 1 in	1.75/1.55 m
Outrigger footprint (l/w) (RT/Narrow)	5 ft 4 in/4 ft 2 in	1.63/1.27 m	5 ft 4 in/4 ft 2 in	1.63/1.27 m	6 ft/5 ft	1.83/1.52 m
H Corner access*** (Standard)	1 ft 3 in	.38 m	1 ft 2 in	.36 m	1 ft 7 in	.48 m
Corner access*** (RT/Narrow)	1 ft 2 in	.36 m	1 ft 1 in	.33 m	1 ft 7 in	.48 m
A J Wall access front/side (Standard)	6 in/1 ft 1 in	.15/.33 m	3 in/1 ft 1 in	.08/.33 m	5 in/1 ft 5 in	.13/.43 m
Wall access front/side (RT/Narrow)	9 in/1 ft	.23/.30 m	6 in/1 ft	.15/.30 m	7 in/1 ft 5 in	.18/.43 m
Platform Dimensions: (l/w/h)						
Standard	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m
Gated standard	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m
Gated narrow	26/20/44.75 in	.66/.51/1.14 m	26/20/44.75 in	.66/.51/1.14 m	26/20/44.75 in	.66/.51/1.14 m
Gated ultra-narrow	22/18/44.75 in	.56/.46/1.14 m	22/18/44.75 in	.56/.46/1.14 m	22/18/44.75 in	.56/.46/1.14 m
Standard fiberglass	29/26.5/43.5 in	.74/.67/1.10 m	29/26.5/43.5 in	.74/.67/1.10 m	29/26.5/43.5 in	.74/.67/1.10 m

Power


Power source	12V DC 110/50-60 Hz or 220/50-60 Hz AC
--------------	--

Weight

AC models (Standard)	677 lbs	307 kg	727 lbs	330 kg	777 lbs	352 kg
AC models (RT/Narrow)	660 lbs	299 kg	694 lbs	315 kg	729 lbs	330 kg
DC models (Standard)	766 lbs	348 kg	817 lbs	371 kg	867 lbs	393 kg
DC models (RT/Narrow)	749 lbs	339 kg	780 lbs	355 kg	818 lbs	370 kg
Air motor (Standard)	_____	_____	_____	_____	777 lbs	352 kg
Air motor (RT/Narrow)	_____	_____	_____	_____	729 lbs	331 kg

Standards Compliance

ANSI A92.3, CSA B354.1, EN 280, AS 1418.10

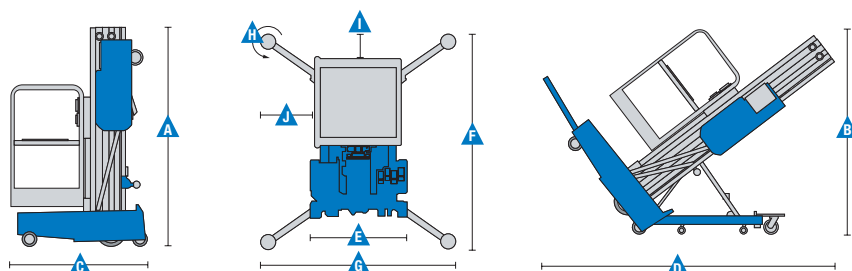

Aerial Work Platforms

AWP® Super Series™

Specifications

Models	AWP-36S		AWP-40S	
Measurements	US	Metric	US	Metric
Working height*	42 ft 5 in	13.1 m	46 ft 4 in	14.29 m
Platform height	36 ft 5 in	11.10 m	40 ft 4 in	12.29 m
A Height - stowed (Standard)	9 ft 1.5 in	2.78 m	9 ft 1.5 in	2.78 m
stowed (RT)	_____	_____	_____	_____
B tilted back** (Standard)	6 ft 3.5 in	1.92 m	6 ft 6 in	1.98 m
C Length - stowed (Standard)	4 ft 7 in	1.40 m	4 ft 8 in	1.42 m
stowed (RT)	_____	_____	_____	_____
D Length - tilted back**	9 ft 9 in	2.97 m	9 ft 9 in	2.97 m
E Width (Standard)	2 ft 5 in	.74 m	2 ft 5 in	.74 m
Width (RT)	_____	_____	_____	_____
Width (Narrow)	_____	_____	_____	_____

Productivity

Lift capacity	350 lbs	159 kg	300 lbs	136 kg
ANSI/CSA:				
F G Outrigger footprint (l/w) (Standard)	6 ft 11 in/6 ft 3 in	2.1/1.9 m	7 ft 5 in/6 ft 9 in	2.26/2.06 m
Outrigger footprint (l/w) (RT)	_____	_____	_____	_____
H Corner access*** (Standard)	2 ft 5 in	.74 m	2 ft 7 in	.79 m
Corner access*** (RT)	_____	_____	_____	_____
I J Wall access front/side (Standard)	1 ft 2 in/2 ft 1 in	.36/.64 m	1 ft 3 in/2 ft 4 in	.38/.71 m
Wall access front/side (RT)	_____	_____	_____	_____
Platform Dimensions: (l/w/h)				
Standard	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m
Gated standard	27/26/44.75 in	.69/.66/1.14 m	27/26/44.75 in	.69/.66/1.14 m
Gated narrow	26/20/44.75 in	.66/.51/1.14 m	26/20/44.75 in	.66/.51/1.14 m
Gated ultra-narrow	22/18/44.75 in	.56/.46/1.14 m	22/18/44.75 in	.56/.46/1.14 m
Standard fiberglass	29/26.5/43.5 in	.74/.67/1.10 m	29/26.5/43.5 in	.74/.67/1.10 m

Power

Power source	12V DC 110/50-60 Hz or 220/50-60 Hz AC
--------------	--

Weight

AC models (Standard)	1,040 lbs	472 kg	1,040 lbs	472 kg
AC models (RT)	_____	_____	_____	_____
DC models (Standard)	1,107 lbs	502 kg	1,130 lbs	513 kg
DC models (RT)	_____	_____	_____	_____
Air motor (Standard)	_____	_____	_____	_____
Air motor (RT)	_____	_____	_____	_____

Standards Compliance

ANSI A92.3, CSA B354.1, EN 280, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Tilt back height with standard platform. For tilt back height with other platforms, please contact your sales representative.

*** Corner of platform top rail to corner of wall with ability to rotate leveling jack handle.

Features

Standard Features	Standard Features	Options & Accessories
Measurements AWP-20S <ul style="list-style-type: none"> • 26 ft 1 in (8.12 m) working height • 20 ft 1 in (6.12 m) platform height • 2 ft 5 in (.74 m) standard base width • 2 ft 6 in (.76 m) RT base width • 1 ft 11 in (.58 m) narrow base width • Up to 350 lbs (159 kg) lift capacity AWP-25S <ul style="list-style-type: none"> • 30 ft 10 in (9.57 m) working height • 24 ft 10 in (7.57 m) platform height • 2 ft 5 in (.74 m) standard base width • 2 ft 6 in (.76 m) RT base width • 1 ft 11 in (.58 m) narrow base width • Up to 350 lbs (159 kg) lift capacity AWP-30S <ul style="list-style-type: none"> • 35 ft 6 in (11.02 m) working height • 29 ft 6 in (9.02 m) platform height • 2 ft 5 in (.74 m) standard base width • 2 ft 6 in (.76 m) RT base width • 1 ft 11 in (.58 m) narrow base width • Up to 350 lbs (159 kg) lift capacity AWP-36S <ul style="list-style-type: none"> • 42 ft 5 in (13.10 m) working height • 36 ft 5 in (11.10 m) platform height • 2 ft 5 in (.74 m) standard base width • Up to 350 lbs (159 kg) lift capacity AWP-40S <ul style="list-style-type: none"> • 46 ft 4 in (14.29 m) working height • 40 ft 4 in (12.29 m) platform height • 2 ft 5 in (.74 m) standard base width • Up to 300 lbs (136 kg) lift capacity 	Productivity <ul style="list-style-type: none"> • Auxiliary platform lowering • Most rigid mast in the industry • Rocker base system for maneuverability • Tilt back frame (standard on AWP™-36, -40) • Easily rolls through standard doorways • AC power to platform*** • Dual activated up/down switch • Ground fault interrupt (ANSI / CSA only) • Small outrigger footprints • Outrigger storage sockets • Easy loading in pickup trucks • Tie down attachment points • Overhead crane attachment point • Wide, rear access forklift pockets • LED lights indicate outrigger installation Power <ul style="list-style-type: none"> • AC power 85V / 50-60 Hz • AC power 110V / 50-60 Hz • AC power 220V / 50-60 Hz • DC power with worldwide automatic smart charging system (12V / 110V / 230V / 50-60 Hz) 	Productivity <ul style="list-style-type: none"> • Super Straddle**** • Descent light and alarm package • Work station tool tray* • Fluorescent tube caddy** • Platform locating laser light** Power <ul style="list-style-type: none"> • Air motor power 1.5 hp (1.1 kW) (AWP™-30 only) Platform Options <ul style="list-style-type: none"> • Gated standard platform • Gated narrow platform • Gated ultra-narrow platform • Standard fiberglass platform Base Options <ul style="list-style-type: none"> • Rough terrain (RT) base with pneumatic casters and rear wheels (AWP™-20, -25, -30 only) • Narrow base (AWP-20, AWP-25, AWP-30 only)



* Not available on narrow or ultra-narrow platform
 ** Not available on fiberglass platform
 *** Not available with AWP-30S air motor
 ****Not available with air motor option

Genie United States

6464 185th Ave. NE
 Redmond, WA 98052
 Telephone +1 (425) 881-1800
 Toll Free in USA/Canada +1 (800)-536-1800
 Fax +1 (425) 883-3475

Distributed By:

Effective Date: November, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2018 Terex Corporation.

Aerial Work Platforms

AWP® Super Series™

Specifications

Super Straddle Models	AWP-20S		AWP-25S		AWP-30S	
Measurements	US	Metric	US	Metric	US	Metric
A Height	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m
B Length (adjustable)	9 ft 1 in - 11 ft 3 in	2.77 - 3.25 m	9 ft 1 in - 11 ft 3 in	2.77 - 3.25 m	9 ft 1 in - 11 ft 3 in	2.77 - 3.25 m
C Width	36.5 in	.93 m	36.5 in	.93 m	36.5 in	.93 m
Width with required outriggers						
ANSI, CSA	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	6 ft 9 in	2.05 m
D Wheelbase (adjustable)	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m
E Straddle clearance	4 ft	1.22 m	4 ft	1.22 m	4 ft	1.22 m
F Height to ladder	2 ft 3 in	.69 m	2 ft 3 in	.69 m	2 ft 3 in	.69 m
G Height to fixed wheel	3 ft 4 in	1.02 m	3 ft 4 in	1.02 m	3 ft 4 in	1.02 m
Storage dimensions (l/w/d)	80/37/24 in	2.03/0.94/0.61 m	80/37/24 in	2.03/0.94/0.61 m	80/37/24 in	2.03/0.94/0.61 m


Weight

580 lbs	264 kg	580 lbs	264 kg	580 lbs	264 kg
---------	--------	---------	--------	---------	--------

Super Straddle Models	AWP-36S		AWP-40S	
Measurements	US	Metric	US	Metric
A Height	5 ft 10 in	1.78 m	5 ft 10 in	1.78 m
B Length (adjustable)	9 ft 1 in - 11 ft 3 in	2.77 - 3.25 m	9 ft 1 in - 11 ft 3 in	2.77 - 3.25 m
C Width	36.5 in	.93 m	36.5 in	.93 m
Width with required outriggers				
ANSI, CSA	8 ft 5 in	2.57 m	9 ft 1 in	2.77 m
D Wheelbase (adjustable)	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m	8 ft 8 in - 10 ft 8 in	2.64 - 3.25 m
E Straddle clearance	4 ft	1.22 m	4 ft	1.22 m
F Height to ladder	2 ft 3 in	.69 m	2 ft 3 in	.69 m
G Height to fixed wheel	3 ft 4 in	1.02 m	3 ft 4 in	1.02 m
Storage dimensions (l/w/d)	80/37/24 in	2.03/0.94/0.61 m	80/37/24 in	2.03/0.94/0.61 m

Weight


580 lbs	264 kg	580 lbs	264 kg
---------	--------	---------	--------

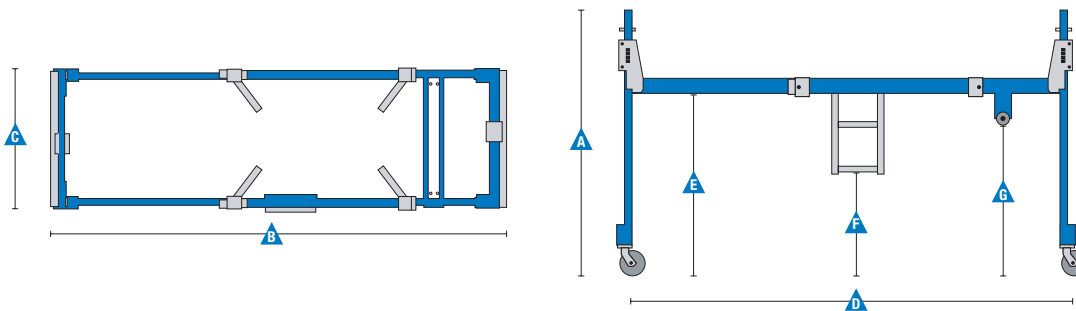

Aerial Work Platforms

IWP® Super Series™

Specifications



Models	IWP-20S		IWP-25S		IWP-30S	
Measurements	US	Metric	US	Metric	US	Metric
Working height*	26 ft 3 in	8.17 m	30 ft 11 in	9.6 m	35 ft 6 in	11 m
Platform height	20 ft 3 in	6.17 m	24 ft 11 in	7.6 m	29 ft 6 in	9 m
A Horizontal outreach**	2 ft 2 in	0.61 m	—	—	—	—
B Height - stowed:						
fully lowered	6 ft 4 in	1.93 m	6 ft 4 in	1.93 m	6 ft 4 in	1.93 m
base raised	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m	6 ft 6 in	1.98 m
C Length	5 ft	1.52 m	5 ft	1.52 m	5 ft	1.52 m
D Width - standard base	2 ft 8 in	0.81 m	2 ft 8 in	0.81 m	—	—
wide base	—	—	—	—	3 ft 4 in	1.02 m
Corner access***	6 in	0.15 m	6 in	0.15 m	7 in	0.18 m

Productivity

Lift capacity:	350 lbs	159 kg	350 lbs	159 kg	350 lbs	159 kg
with outreach option	300 lbs	136 kg	—	—	—	—
Platform Dimensions (l/w/h)						
Standard	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm
Gated standard	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm	27/26/44.75 in	69/66/114 cm
Gated narrow	26/20/44.75 in	66/51/114 cm	26/20/44.75 in	66/51/114 cm	26/20/44.75 in	66/51/114 cm
Standard fiberglass**	29/26.5/43.5 in	74/67/110 cm	29/26.5/43.5 in	74/67/110 cm	29/26.5/43.5 in	74/67/110 cm

Power

AC models	110 V / 50-60 Hz or 220 V / 50-60 Hz
DC models	12V

Weight****

Standard base

ANSI/CSA (AC)	1,245 lbs	564 kg	1,290 lbs	585 kg	—	—
ANSI/CSA (DC)	1,345 lbs	610 kg	1,390 lbs	630 kg	—	—

Standard base with outreach option

ANSI (AC)	1,350 lbs	612 kg	—	—	—	—
ANSI (DC)	1,450 lbs	658 kg	—	—	—	—

Wide base

ANSI (AC)	—	—	—	—	1,430 lbs	649 kg
ANSI (DC)	—	—	—	—	1,530 lbs	694 kg

Standards Compliance

ANSI A92.3, CSA B354.1, EN 280, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Horizontal outreach option available only on the IWP-20S, not available with fiberglass platform

*** Corner of platform top rail to corner of wall with ability to rotate leveling jack handle.

**** Weight will vary depending on options and/or country standards.

Features

Standard Features

Measurements

IWP-20S

- 26 ft 2 in (8.15 m) working height
- 20 ft 2 in (6.15 m) platform height
- 2 ft 8 in (0.81 m) standard base width
- Outreach option adds 2 ft 2 in (0.66 m) of horizontal reach
- Up to 350 lbs (159 kg) lift capacity

IWP-25S

- 30 ft 5 in (9.44 m) working height
- 24 ft 5 in (7.44 m) platform height
- 2 ft 8 in (.81 m) standard base width
- Up to 350 lbs (159 kg) lift capacity

IWP-30S

- 35 ft 6 in (11 m) working height
- 29 ft 6 in (9 m) platform height
- 3 ft 4 in (1.02 m) wide base width
- Up to 350 lbs (159 kg) lift capacity

Productivity

- Standard base (IWP[™]-20S and 25S only)
- Sliding mid-rail standard platform
- Auxiliary platform lowering
- Most rigid mast in the industry
- Standard base rolls through standard doorways
- Wide base rolls through double doorways
- AC power to platform
- Dual activated up/down switch
- Ground fault interrupter lower receptacle
- Tie down attachment points
- Overhead crane attachment point
- Wide forklift pockets
- Built-in level sensing with interlocks

Power

- DC power with worldwide automatic smart charging system (12V / 110V / 230V / 50-60 Hz)

Options & Accessories

Productivity

- Outreach option (IWP-20S only) (not available for CSA)
- Operational warning light and descent alarm package
- Tool tray
- Fluorescent tube caddy
- Platform locating laser light

Power

- Power wheel assist with dual battery package*
- Dual battery package (DC only)
- AC power 85V, 110V or 220V / 50-60 Hz

Platform

- Gated standard platform
- Gated narrow platform
- Standard fiberglass platform**

Base

- Wide base (IWP[™]-30 only)



Shown with optional power wheel assist

* Adds 12.5 in (.32 m) to unit length and 285 lbs (129 kg) to unit weight, DC only

** Not available with Outreach package

Genie United States

6464 185th Ave. NE
Redmond, WA 98052
Telephone +1 (425) 881-1800
Toll Free in USA/Canada +1 (800)-536-1800
Fax +1 (425) 883-3475

Distributed By: